

Light



TRAVEL TRAILERS & FIFTH WHEELS

DESTINATION: UNCHARTED



Highland
RIDGE RV

Own the Outdoors



TRAVEL TRAILERS



LT271RLS




LT291RLS



LT275RLS




LT312BHS

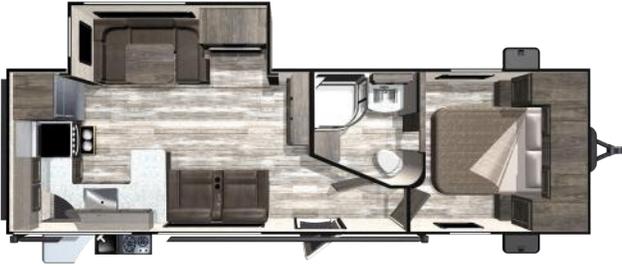

LT280RKS

FIFTH WHEELS

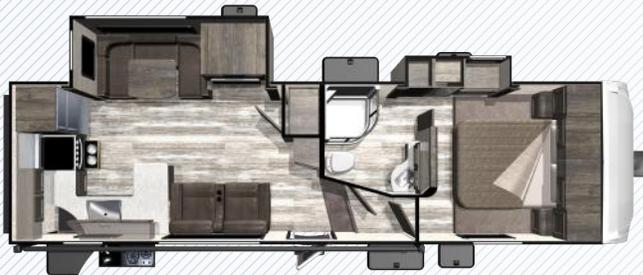


LF280RKS



LF295BHS



LF291RLS

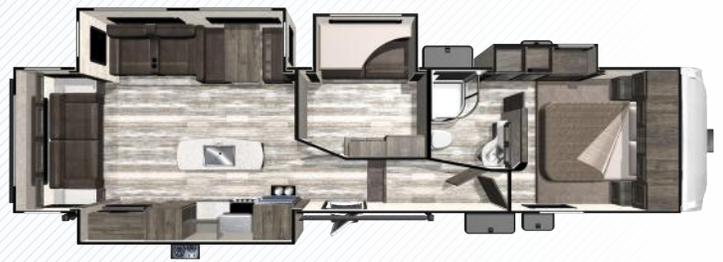

LF335MBH

FLOORPLANS

FEATURES

STANDARDS

- » 1/2 Ton Towable (FW)
- » 100# Full Extension Drawer Guides
- » 8 Cu. Ft. Refrigerator
- » LED Lighting in Ceilings
- » Quick Recovery Gas/Electrical Water Heater
- » 15k A/C with Quiet Residential Return Air
- » Prepped for Observation Camera
- » Key-Alike System
- » Aluminum Tread Entry Steps
- » Power Awning(s) with LED Lighting
- » Stainless Steel Appliances
- » Stainless Steel Under Mount Sinks (Kitchen & Lav)
- » Outside Enclosed Docking Station
- » Battery Disconnect
- » Solar Prep
- » Queen Mattress (60" x 80")
- » Solid Surface Kitchen Countertops & Seamless Tops
- » Linoleum Throughout
- » Patent Flush Floor Slides with Vinyl Flooring (No Carpet)
- » Framelss Windows
- » Hardwood Cabinet Doors
- » 50 Amp Service
- » PVC Roofing Membrane (15 Year Warranty/ Non-Prorated)
- » Porcelain Toilet
- » Linoleum Throughout Main Living Areas & Slides (FW)
- » Walk Around Queen Bed with Best in Class Headroom (FW)
- » Heat Registers Strategically Placed (No Registers in Floor)
- » Pet Friendly
- » Pull Out Pet Dishes
- » Wi-Fi Ready
- » 300lb. Accessory Hitch (FW)

OPTIONS

- » A/C - 2nd A/C, 13.5k BTU Ducted
- » BBQ Grill with Bumper Bracket
- » Bike Rack - LCI Jack-It Front Bike Rack (TT)
- » Power Front and Rear Stabilizer Jacks (TT)
- » Recliners ipo Std. Theater Seats (280)
- » U-Lounge ipo Std. Theater Seats/Booth (275, 295, 312)
- » Table/Chairs ipo Std. Booth
- » Tri-Fold Sofa ipo Std Power Theater Seats (N/A 291)

SPECIFICATIONS

| | LT271RLS | LT275RLS | LT280RKS | LT291RLS | LT312BHS | LF280RKS | LF291RLS | LF295BHS | LF335MBH |
|------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Square Feet | 262 | 310 | 260 | 300 | 342 | 280 | 317 | 320 | 370 |
| UVW | 5710 | 7065 | 5900 | 6483 | 7745 | 7360 | 7840 | 8325 | 9515 |
| Hitch Weight | 707 | 880 | 675 | 822 | 935 | 1100 | 1305 | 1320 | 1450 |
| GVWR | 7400 | 8995 | 7675 | 8600 | 9735 | 9990 | 9995 | 9995 | 11900 |
| Cargo (Gross) | 1690 | 1635 | 1775 | 2117 | 1990 | 2540 | 2155 | 1670 | 2383 |
| Length (Pin to Rear) | 31' 5" | 33' 11" | 31' 9" | 33' 5" | 36' 11" | 29' 11" | 31' 11" | 33' 11" | 37' 3" |
| Ext. Height | 131" | 131" | 131" | 131" | 131" | 151" | 151" | 151" | 151" |
| Ext. Width | 97" | 97" | 97" | 97" | 97" | 97" | 97" | 97" | 97" |
| Ext. Width (Slides Out) | 135" | 156" | 135" | 156" | 169" | 135" | 156" | 135" | 156" |
| Interior Height (Upper Deck) | - | - | - | - | - | 80" | 80" | 80" | 80" |
| Interior Height (Overall) | 82" | 82" | 82" | 82" | 82" | 92" | 92" | 92" | 92" |
| Fresh Water (Gal.) | 51 | 51 | 51 | 51 | 51 | 51 | 51 | 51 | 51 |
| Gray Water (Gal.) | 29 | 58 | 58 | 58 | 70 | 58 | 58 | 58 | 58 |
| Waste Water (Gal.) | 29 | 29 | 29 | 29 | 29 | 29 | 29 | 29 | 29 |
| LP Capacity (lbs.) | 60 | 60 | 60 | 60 | 60 | 60 | 60 | 60 | 60 |
| Tire Size | 15" | 15" | 15" | 15" | 15" | 15" | 15" | 15" | 15" |
| Awning Size | 20' | 20' | 20' | 10', 11' | 9',11' | 20' | 9', 11' | 21' | 20' |

1 SLIDE OUTS

- » Best in class slide height and depth
- » Flush floor slides with linoleum
- » Electric Motor Slide System
- » Fully laminated construction plus 3M flashing tape along corners to prevent leaks

2 DOORS & LOCKS

- » Full-width entrance doors with built-in screen doors
- » Entrance and baggage doors on secure and convenient key-alike system

3 ROOF

- » Double batten insulation layered with radiant foil
- » Screw-mounted plywood decking topped with premium quality PVC
- » No treatment required! Will not chalk or spot
- » Heat reflecting properties keep coach cooler in the summer

4 FLOORS


- » Double-welded aluminum framed floors
- » Insulated with rigid foam insulation, wrapped with a woven underbelly moisture barrier, and strengthened with an overlapping double layer of laminate

5 SIDEWALLS

- » Lightweight, double-welded aluminum framed walls
- » Rigid foam insulation
- » Gel coat fiberglass- all sidewalls, rear walls, slide out endwalls and roof are fully laminated

6 MAIN BODY

- » Class-leading I-beam chassis and draw bars
- » Equa-Flex suspension system
- » Aluminum wheels with nitrogen-filled tires
- » EZ Lube hubs

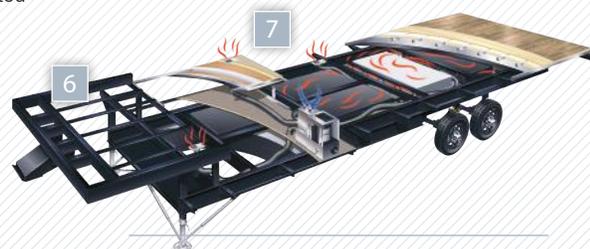

7 INDUSTRY-LEADING HEATING SYSTEM

Oversize 4-inch heat ducts run from the furnace down to the fully enclosed underbelly and wrap around the tanks suspended between the chassis I-beams. Holding tanks are warmed by the forced air heat which prevents freeze-ups.

A return at the end of the tank connecting back into the coach provides the necessary air flow.



We stand behind our products. At Highland Ridge RV, we are one of the few manufacturers that have a 3-Year Limited Structural Warranty.

MORE ROOM
LESS WEIGHT

This is our mission at Highland Ridge RV. It drives us to innovate and revolutionize the RV industry and it's why our products are 10 - 15% lighter than the competition.



Our Pet Friendly units offer linoleum throughout the main living areas, and no floor registers.



We put our products into a zero degree chamber for five hours with thermometers placed in key areas throughout the unit. The results speak for themselves.

Your Light Dealer:



For more information visit us at:
www.HighlandRidgeRV.com

Due to continual research and advances, manufacturer reserves the right to change specifications, design, price, and equipment without notice, and assumes no responsibility for any error in the literature. Some items shown are not included as standard or optional equipment.